


TABLICA KLASIČNIH VARIATORSKIH REMENA

poprečni presjek šxv	unutarnja duljina (mm)						
13x5	468	26x8	962	32x10	950	47x13	1000
13x5	500	26x8	1082	32x10	1000	47x13	1060
		28x8	600	32x10	1073	47x13	1120
17x5	426	28x8	650	32x10	1120	47x13	1180
17x5	476	28x8	700	32x10	1180	47x13	1250
17x5	536	28x8	750	32x10	1200	47x13	1320
17x5	570	28x8	800	32x10	1353	47x13	1400
17x5	606	28x8	850			47x13	1500
17x5	776	28x8	900	37x10	660	47x13	1600
		28x8	950	37x10	800	47x13	1700
21x6	530	28x8	1000	37x10	850	47x13	1800
21x6	600	28x8	1060	37x10	900		
21x6	610	28x8	1120	37x10	950	52x16	1180
21x6	675	28x8	1180	37x10	1000	52x16	1250
21x6	770	28x8	1250	37x10	1020	52x16	1325
21x6	870	28x8	1320	37x10	1060	52x16	1400
21x6	970	28x8	1400	37x10	1120	52x16	1525
21x6	1220	28x8	1500	37x10	1180	52x16	1600
				37x10	1250	52x16	1725
22x8	485	30x10	650	37x10	1320	52x16	1925
22x8	525	30x10	665	37x10	1400	52x16	2165
22x8	565	30x10	700	37x10	1500	52x16	2240
22x8	650	30x10	800	37x10	1600		
22x8	700	30x10	850	37x10	1700	55x16	1400
22x8	750	30x10	875	37x10	1800	55x16	1500
22x8	800	30x10	900			55x16	1600
22x8	850	30x10	950	41x13	925	55x16	1700
22x8	900	30x10	1000	41x13	1000	55x16	1800
22x8	950	30x10	1035	41x13	1040		
22x8	1000	30x10	1120	41x13	1060	65x20	1706
22x8	1060	30x10	1200	41x13	1120	65x20	1906
22x8	1185	30x10	1340	41x13	1180		
		30x10	1500	41x13	1190	70x18	1600
26x8	655	30x10	1600	41x13	1250	70x18	1700
26x8	672			41x13	1340	70x18	1800
26x8	710	32x10	750	41x13	1440	70x18	1900
26x8	750	32x10	790	41x13	1600	70x18	2000
26x8	762	32x10	820	41x13	1740	70x18	2240
26x8	800	32x10	850	41x13	1940	70x18	2500
26x8	862	32x10	900				

Razlika između vanjske (La) i unutarnje (Li) duljine (opsega) remena računa se prema formuli:

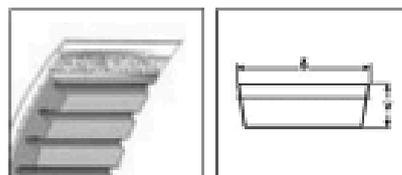

$$La - Li = 2 \times \pi \times v$$

$$La = Li + 2 \times \pi \times v$$

$$Li = La - 2 \times \pi \times v$$

Variatorski remeni imaju antistatička svojstva po ISO 1813 normi o elektrovođljivosti.

Variatorski remeni su izrađeni iz kompaunda otpornih na ulja i masti, toplinu, ozonske utjecaje i sunčevu svjetlost, vremenske utjecaje i starenje.

Temperaturno radno područje variatorskih remena je od -30°C do 80°C.

ISO DIMENZIJE VARIATORSKIH REMENA

ISO OZNAKA	POPREČNI PRESJEK š x v	UNUTARNJA DULJINA	ISO DULJINA (Ld=pitch length)
W16-630	17 x 5	606Li (mm)	630 Ld (mm)
W16-710	17 x 5	686Li (mm)	710 Ld (mm)
W16-800	17 x 5	776Li (mm)	800 Ld (mm)
W16-900	17 x 5	875Li (mm)	900 Ld (mm)
W16-1000	17 x 5	976Li (mm)	1000 Ld (mm)
W20-630	21 x 6	600Li (mm)	630 Ld (mm)
W20-710	21 x 6	675Li (mm)	710 Ld (mm)
W20-800	21 x 6	770Li (mm)	800 Ld (mm)
W20-900	21 x 6	870Li (mm)	900 Ld (mm)
W20-1000	21 x 6	970Li (mm)	1000 Ld (mm)
W20-1120	21 x 6	1090Li (mm)	1120 Ld (mm)
W20-1250	21 x 6	1220Li (mm)	1250 Ld (mm)
W25-710	26 x 8	672Li (mm)	710 Ld (mm)
W25-800	26 x 8	762Li (mm)	800 Ld (mm)
W25-900	26 x 8	862Li (mm)	900 Ld (mm)
W25-1000	26 x 8	962Li (mm)	1000 Ld (mm)
W25-1120	26 x 8	1082Li (mm)	1120 Ld (mm)
W25-1250	26 x 8	1212Li (mm)	1250 Ld (mm)
W25-1400	26 x 8	1362Li (mm)	1400 Ld (mm)
W25-1600	26 x 8	1562Li (mm)	1600 Ld (mm)
W31.5-900	32 x 10	850Li (mm)	900 Ld (mm)
W31.5-1000	32 x 10	950Li (mm)	1000 Ld (mm)
W31.5-1120	32 x 10	1070Li (mm)	1120 Ld (mm)
W31.5-1250	32 x 10	1200Li (mm)	1250 Ld (mm)
W31.5-1400	32 x 10	1350Li (mm)	1400 Ld (mm)
W31.5-1600	32 x 10	1550Li (mm)	1600 Ld (mm)
W31.5-1800	32 x 10	1750Li (mm)	1800 Ld (mm)
W31.5-2000	32 x 10	1950Li (mm)	2000 Ld (mm)
W40-1120	41 x 13	1060Li (mm)	1120 Ld (mm)
W40-1250	41 x 13	1190Li (mm)	1250 Ld (mm)
W40-1400	41 x 13	1340Li (mm)	1400 Ld (mm)
W40-1600	41 x 13	1540Li (mm)	1600 Ld (mm)
W40-1700	41 x 13	1640Li (mm)	1700 Ld (mm)
W40-1800	41 x 13	1740Li (mm)	1800 Ld (mm)
W40-2000	41 x 13	1940Li (mm)	2000 Ld (mm)
W40-2240	41 x 13	2180Li (mm)	2240 Ld (mm)
W40-2500	41 x 13	2440Li (mm)	2500 Ld (mm)
W50-1400	52 x 16	1325Li (mm)	1400 Ld (mm)
W50-1600	52 x 16	1525Li (mm)	1600 Ld (mm)
W50-1800	52 x 16	1725Li (mm)	1800 Ld (mm)
W50-2000	52 x 16	1925Li (mm)	2000 Ld (mm)
W50-2240	52 x 16	2165Li (mm)	2240 Ld (mm)
W50-2500	52 x 16	2425Li (mm)	2500 Ld (mm)
W50-2800	52 x 16	2725Li (mm)	2800 Ld (mm)
W50-3150	52 x 16	3075Li (mm)	3150 Ld (mm)
W63-1800	65 x 20	1706Li (mm)	1800 Ld (mm)
W63-2000	65 x 20	1906Li (mm)	2000 Ld (mm)
W63-2240	65 x 20	2146Li (mm)	2240 Ld (mm)
W63-2500	65 x 20	2406Li (mm)	2500 Ld (mm)
W63-2800	65 x 20	2706Li (mm)	2800 Ld (mm)
W63-3150	65 x 20	3056Li (mm)	3150 Ld (mm)